


Duo Com Module Configuration Guide

1. Duo Com Module Appearance

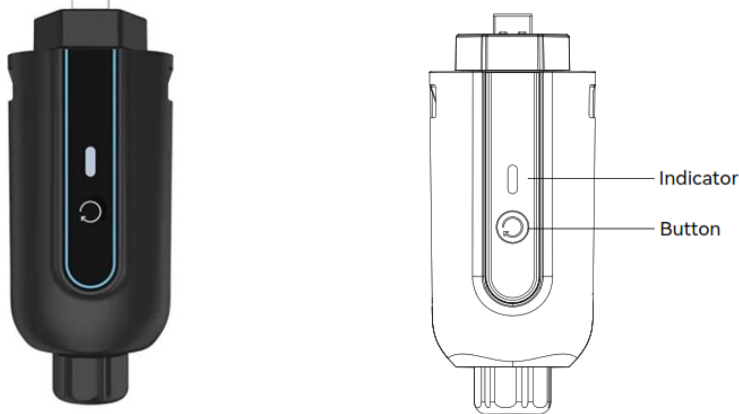

	Press the Button less than 5s : Restart	
	Press the Button more than 5s: Reset (Delete the previous configuration)	
	OFF	Connection abnormal
	Slowly flashing	The DuoCOM is not connected to the router.
	Quickly flashing	The DuoCOM is connected to the router but not connected to the server.
	Always on	The DuoCOM is normal working.

2. Notice:

- Press the Button >5s, Reset the module (Deleted the previously configuration)
- Press the Button <5s, Restart
- To assure a successful connection of the module, the inverter firmware version needs to be higher than ARM-00(06)

Initial Page	WIFI Channel	LAN Channel
No access		
	WIFI access	LAN access

3. WIFI Mode

- a. Confirm that Duo Com is installed and the indicator light is blinking .

(When configuring WIFI, the Duo Com can not be connected to the network cable)



- b. Make sure that there is no symbol in the upper right corner of the inverter display.

If there is such a symbol  in the upper right corner (as shown in the figure on the right), press and hold the DUOCOM button for more than 3s until the communication module is reset.

- c. WIFI Configuration.

- d. If a signal light is displayed in the upper right corner, it identifies successful configuration. RSSI page will appear under general settings

1

Prepare a laptop or Smartphone and turn on the WLAN connection.



2

Searching for the corresponding WLAN in the WLAN connection list
"WIFI-AP*****"
(*represents the last 8 numbers of the inverter SN), and tap connect.



3

Open the browser and enter 10.10.100.254.



4

Tap "Scan", A list of WiFi network names pop up.



5

Click and select the corresponding router network you want to configure.



6

Input the password of wireless network, (note the case difference), Tap "Connect"



4. LAN Mode

- a. Confirm that DuoCom is installed properly and the indicator light is blinking.

(When configuring LAN, the Duo Com must be connected to the network cable first)



- b. Once the installation is complete, the icon  will be displayed in the upper right corner.

If no icon is displayed (as shown in the figure on the right), press and hold the DuoCom button for more than 3s until the module is reset.

If the Duo Com module is successfully connected to the internet, the indicator light is always on.